

# LUGATO

## BESTE BASIS Konzentrat



Deep primer for paints, plasters, adhesives and floor levelling compounds. Required for all absorbent substrates, e.g. gypsum building materials.

Concentrate. BESTE BASIS is also available ready to use.

### Product performance

- | Solvent-free primer concentrate with double coverage.
- | Cost effective through 1 : 1 dilution with water.
- | Penetrates deep into building materials.
- | Regulates the absorbency of building materials.
- | Dries quickly and colourlessly.
- | Extends the open time and thus the post-processing time of subsequent products.
- | Improves the adhesion of paints, plasters, adhesives, floor levelling compounds, wall fillers, wallpapers.
- | On floor, wall and ceiling. Indoor and outdoor use.
- | Very low emission (EMICODE EC1) - therefore particularly suitable for indoor use.



Primes an absorbent plaster before subsequent work, e.g., painting.

## Substrates and preparation

<b>Suitable</b>	anhydrite screeds, concrete, gypsum building boards, gypsum fibre boards, gypsum plasterboard, heated screeds (anhydrite or cement-bound), wooden floors, sand-lime brickwork, lime-cement, cement plaster, cellular concrete, chipboard, OSB boards, cement screeds. Observe the priming instructions for the respective LUGATO follow-up product, e.g. sealants, tile adhesives, floor levelling compounds, wall fillers, paints, synthetic resin plasters!
<b>Consistency</b>	absorbent, clean, load-bearing, not friable, dry, free of separating impurities.
<b>Preparation</b>	remove crumbly surfaces down to a sound substrate. Remove dust.

## Processing



Dilute BESTE BASIS concentrate 1 : 1 with water.



Apply diluted with mop or brush. Avoid puddles and streak formation. Apply only so much BESTE BASIS that no glossy film is produced.

## Product data

<b>Quantity required</b>	50–100 ml undiluted material/m <sup>2</sup> , depending on the absorbency of the substrate.
<b>Yield</b>	50–100 m <sup>2</sup> (5 l); 10–20 m <sup>2</sup> (1 l).
<b>Application / substrate temperature</b>	5–30 °C.
<b>Drying time</b>	1–4 hours.
<b>Ecology</b>	solvent free. Very low emissions (EMICODE EC 1).
<b>Ingredients</b>	plastic dispersion, defoamer, preservative (Contains benzisothiazolone (BIT). May produce an allergic reaction.).
<b>Package sizes</b>	5 l, 1 l.
<b>Shelf life</b>	in original packaging at least: see label. Store in a frost-protected place. All times based on 15–20 °C and 65% rel. humidity.

## Please note

- ! Protect adjacent surfaces from splashes.
- ! Protect primed surfaces from frost and rain until they are completely dry.

### Arbeitssicherheit:



Danger

Contains 2-Methyl-2H-isothiazol-3-on. May produce an allergic reaction. Contains 1,2-Benzisothiazol-3(2H)-on. May produce an allergic reaction. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/protective clothing/eye protection/face protection. Dispose of contents/container in accordance with local and national regulations. Safety data sheet is available on request, or can be downloaded on the Internet at [www.lugato.com](http://www.lugato.com).

## If you're not sure of something, please ask!

Feel free to give us a call. You can reach the LUGATO experts at: (040) 6 94 07-222.

The statements made in this information sheet reflect our current knowledge and experience. Since we do not have influence on the building-specific circumstances and the correct execution of the work, we can only guarantee the consistent quality of our products.

For that reason in case of doubt, verify the suitability of the product through a sufficient number of test applications. A direct legal liability can be derived neither alone from the instructions in this information sheet nor from any oral consultation.


The publication of this technical information sheet invalidates the previous editions. Subject to change without prior notice.



Responsible Care (RC) for the chemical industry means taking responsible action. It makes this clear through a worldwide initiative. In many countries, chemical associations run national RC programs. In the international initiative, thousands of companies are active with millions of employees. The goal is voluntary commitment to do more than just the compulsory: Promoting sustainability, demonstrating product responsibility, creating more safety for factories and the neighbourhood, improving health protection at the workplace and improving environmental protection. In the frame of its membership in the Verband der deutschen chemischen Industrie, LUGATO has committed itself to adhere to this objective.

## Seminars

In cooperation with its trading associates, LUGATO is glad to pass on practical knowledge such as how to install tiles. Find more information about the current range of handyman seminars at [www.lugato.de](http://www.lugato.de) or at your local dealer.

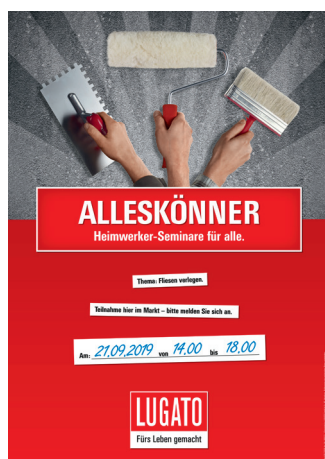

EU: LUGATO GmbH & Co. KG, Großer Kamp 1,  
D-22885 Barsbüttel, ☎ +49 (0)40 69407-0  
Import/sales Schweiz: Puag AG, Oberebenestrasse 51,  
CH-5620 Bremgarten, CH-Infoline: 0848 810 800

Copyright by LUGATO. Stand 04/2022

# LUGATO